

SU Type Pneumatic Muffler Silencer



Product Overview

The SU type pneumatic muffler silencer reduces exhaust noise from pneumatic valves, cylinders, and compressed-air systems. Its compact threaded engineering-plastic body supports lightweight installation and stable airflow diffusion.


Key Features

- Compact SU type threaded exhaust silencer.
- Lightweight engineering-plastic construction.
- Reduces noise from compressed-air exhaust discharge.
- Direct male-thread installation on exhaust ports.
- Stable airflow diffusion for pneumatic equipment.
- Multiple thread sizes from 1/8 inch to 1 inch.

Technical Specifications

Parameter	Specification
Product Type	Pneumatic Muffler Silencer
Model	SU Type
Structure	Threaded Exhaust Silencer
Connection	Male Thread
Material	Engineering Plastic
Operating Fluid	Compressed Air
Function	Exhaust Noise Reduction
Working Pressure	0 - 1.0 MPa
Temperature Range	0 - 60 degrees C
Application	Pneumatic Valves / Cylinders / Air Systems

Model Selection and Dimensions

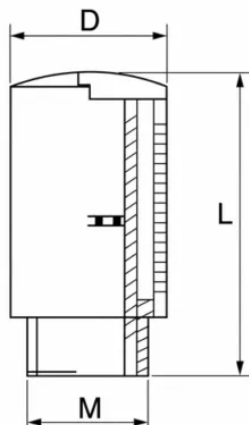

Thread Size (M)	L (mm)	S (mm)
1/8 inch	33	16
1/4 inch	41	19.5
3/8 inch	54	24
1/2 inch	54	24
3/4 inch	113.5	48
1 inch	113	48

Applications

- Pneumatic valves requiring quieter exhaust discharge.
- Air cylinders and general compressed-air systems.
- Industrial automation and production machinery.
- Machine installations requiring compact exhaust silencers.

Product Function

SU silencers diffuse compressed-air exhaust internally to reduce operating noise and improve airflow discharge compared with an open exhaust port.

Selection and Installation

- Match the male thread size to the pneumatic exhaust port.
- Confirm pressure, temperature, airflow, and installation clearance.
- Install securely without over-tightening the plastic body.

Contact Information

Wenzhou Hongmi Pneumatic Co., Ltd.

Address: Room 501, Xingnan Village, Hongqiao Town, Yueqing City, Zhejiang, China

Email: vivilian@homipneu.com

Phone / WhatsApp: +86 136 0580 6063

Website: <https://homipneu.com>