



2Q-15




2Q-20



2Q-25



2Q-35



2Q - 250 - 25

Specification Code

2Q: Two Position Two Way Air Control Valve

Aperture of Flow Rate

160: 16 mm
200: 20 mm
250: 25 mm
350: 35 mm
400: 40 mm
500: 50 mm


Joint Pipe Bore

15: 1/2"
20: 3/4"
25: 1"
35: 1 1/4"
40: 1 1/2"
50: 2"

Specification

Model	2Q160-15	2Q200-20	2Q250-25	2Q350-35	2Q400-40	2Q500-50
Medium	Air, Water, Oil, Gas					
Motion Pattern	Direct Drive					
Aperture of Flow Rate (mm)	16	20	25	35	40	50
CV Value	4.8	12	7.6	24	29	48
Joint Pipe Bore	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Operational Fluid Viscosity	Below 50 CST					
Working-pressure Range	0~7					
Max. Pressure Resistance	10.5					
Control Pressure Range	3~6					
Operating Temp. Range	-5~100°C					
Material of Body	Brass					
Material of Oil Seal	NBR, EPDM & VITON					
Cylinder Model	2-M5	2-G1/8"	2-G1/8"	2-G1/4"	2-G1/4"	2-G1/4"

Overall Dimension

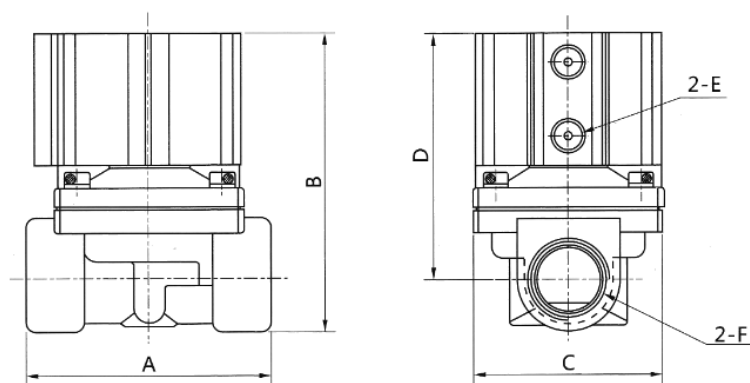

Model	A	B	C	E	F
2Q160-15	64	84	56	M5	1/2"
2Q200-20	66	88	56	1/8"	3/4"
2Q250-25	83	98	71	1/8"	1"
2Q350-35	116	128	93	1/4"	1 1/4"
2Q400-40	116	132	93	1/4"	1 1/2"
2Q500-50	131	143	93	1/4"	2"