

Automatic Retractable Power Cord Reel 10-25M



Product Overview

This automatic retractable power cord reel provides organized electrical access with multiple conductor sizes and 10-25 m cable lengths for workshops and industrial equipment.


Key Features

- Automatic spring rewind stores the electrical cable after use.
- Two-core and three-core cable configurations available.
- 1.5 mm² and 2.5 mm² conductor cross-section options.
- Flexible 10-25 m cable length selection.
- Engineering-grade ABS housing protects the rewind mechanism.
- Reduces loose cable around benches, machinery, and walkways.

Technical Specifications

Parameter	Specification
Product Name	Automatic Retractable Power Cord Reel
Product Type	Automatic spring rewind electrical cable reel
Cable Options	2 x 1.5, 3 x 1.5, 2 x 2.5, 3 x 2.5 mm ²
Available Lengths	10 m, 12 m, 15 m, 20 m and 25 m
Housing Material	Engineering-grade ABS
Retraction Method	Automatic spring rewind
Cable Function	Electrical power transmission
Typical Applications	Workshops, garages, production and maintenance
Plug and Socket	Confirm the required regional standard
Installation Check	Cable, voltage, current, plug, socket and mounting

Model Selection and Dimensions

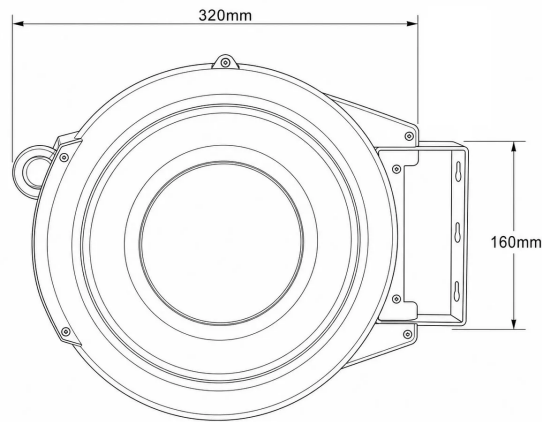

Model	Meter
2 x 1.5 mm ²	10 m, 12 m, 15 m, 20 m, 25 m
3 x 1.5 mm ²	10 m, 12 m, 15 m, 20 m
2 x 2.5 mm ²	10 m, 12 m, 15 m, 20 m
3 x 2.5 mm ²	10 m, 12 m, 15 m, 20 m

Applications

- Workshop power for portable tools, lamps, and maintenance devices.
- Machinery repair, testing equipment, and temporary connections.
- Assembly, inspection, packaging, and manufacturing stations.
- Garage and vehicle service applications.

Installation Guidance

Confirm rated voltage, current, cable specification, plug and socket standards before installation. Secure the reel in a stable position with unobstructed cable travel.

Safety Notes

- Disconnect electrical power before installation or service.
- Do not exceed the cable, plug, or socket electrical ratings.
- Inspect the cable and connectors regularly and replace damaged parts.

Contact Information

Wenzhou Hongmi Pneumatic Co., Ltd.
Address: Room 501, Xingnan Village, Hongqiao Town, Yueqing City, Zhejiang, China
Email: vivilian@homipneu.com
Phone / WhatsApp: +86 136 0580 6063
Website: <https://homipneu.com>