

A009 Plastic Air Blow Gun for Pneumatic Cleaning



Product Overview

The A009 is a lightweight plastic air gun series with five nozzle configurations for compressed air cleaning, drying, and industrial maintenance.


Key Features

- Lightweight plastic body for convenient repeated operation.
- Standard, long, speed, and large diameter nozzle options.
- 130 mm and 300 mm long nozzles for difficult access areas.
- Speed nozzle supports focused local air blowing.
- Large diameter nozzle provides wider blowing coverage.
- 3/8 in NPT connection and customizable nozzle length.

Technical Specifications

Parameter	Specification
Product Name	A009 Plastic Air Gun Series
Available Models	A009, A009-L1, A009-L3, A009-A, A009-D
Working Medium	Filtered compressed air
Operating Temperature	-20 °C to 60 °C
Working Pressure	0 to 8.0 kgf/cm ²
Maximum Pressure Resistance	10.0 kgf/cm ²
Body Material	Plastic
Thread Connection	3/8 in NPT
A009	20 mm, standard nozzle
A009-L1	130 mm, long nozzle
A009-L3	300 mm, long nozzle
A009-A	25 mm, speed nozzle
A009-D	75 mm, large diameter nozzle
Customization	Nozzle length can be customized
Typical Uses	Dust removal, drying, equipment and workstation cleaning

Model Selection and Dimensions

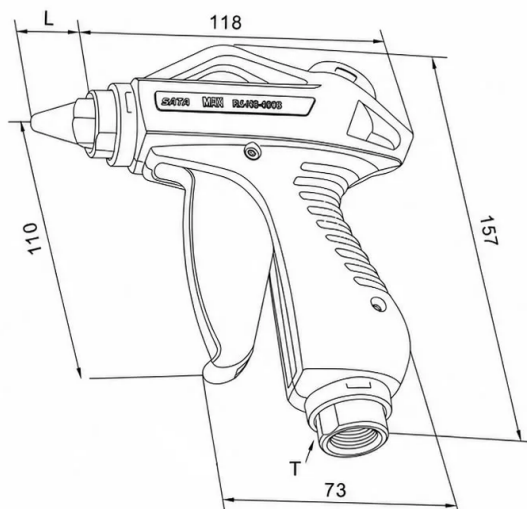

Nozzle Size	
Standard nozzle	
Long nozzle	
Long nozzle	
Speed nozzle	
Large diameter nozzle	

Model	L	Muzzle Size	T	Accessories
A009	20 mm	Standard nozzle	3/8 in NPT	-
A009-L1	130 mm	Long nozzle	3/8 in NPT	-
A009-L3	300 mm	Long nozzle	3/8 in NPT	-
A009-A	25 mm	Speed nozzle	3/8 in NPT	-
A009-D	75 mm	Large diameter nozzle	3/8 in NPT	-

* Nozzle length can be customized.

Applications

- Workshop and machinery cleaning.
- Production line cleaning, drying, and surface preparation.
- Deep, narrow, high, or hard-to-reach equipment areas.
- Focused or wide-area blowing according to nozzle selection.

Operating Guidance

Use filtered compressed air within the specified range. Select the nozzle according to cleaning distance, airflow demand, access space, and required coverage.

Safety Notes

- Do not direct compressed air toward people or unprotected skin.
- Isolate and depressurize the air supply before installation or service.
- Confirm thread compatibility and secure all connections before use.

Contact Information

Wenzhou Hongmi Pneumatic Co., Ltd.
Address: Room 501, Xingnan Village, Hongqiao Town, Yueqing City, Zhejiang, China
Email: vivilian@homipneu.com
Phone / WhatsApp: +86 136 0580 6063
Website: <https://homipneu.com>