

A098 Metal Air Gun Series for Pneumatic Cleaning



Product Overview

The A098 is an adjustable aluminum alloy air gun with four nozzle configurations for compressed air cleaning, drying, and industrial maintenance.


Key Features

- Adjustable airflow control for different cleaning conditions.
- Durable aluminum alloy body for repeated industrial use.
- Speed, small, large diameter, and long nozzle options.
- Quick connector option for convenient hose connection.
- Suitable for dust removal, drying, molds, fixtures, and machines.
- Custom barrel length available for project requirements.

Technical Specifications

Parameter	Specification
Product Name	A098 Metal Air Gun Series
Model Options	A098, A098-S, A098-D, A098-L1
Working Medium	Filtered compressed air
Operating Temperature	-20 °C to 60 °C
Working Pressure	0 to 8.0 kgf/cm ²
Maximum Pressure Resistance	10.0 kgf/cm ²
Body Material	Aluminum alloy
A098	Speed nozzle, 22 mm
A098-S	Small nozzle, 16 mm
A098-D	Large diameter nozzle, 75 mm
A098-L1	Long nozzle, 100 mm
Accessories	Quick connector option
Customization	Barrel length can be customized
Typical Application	Dust removal, adjustable blowing, drying and cleaning

Model Selection and Dimensions

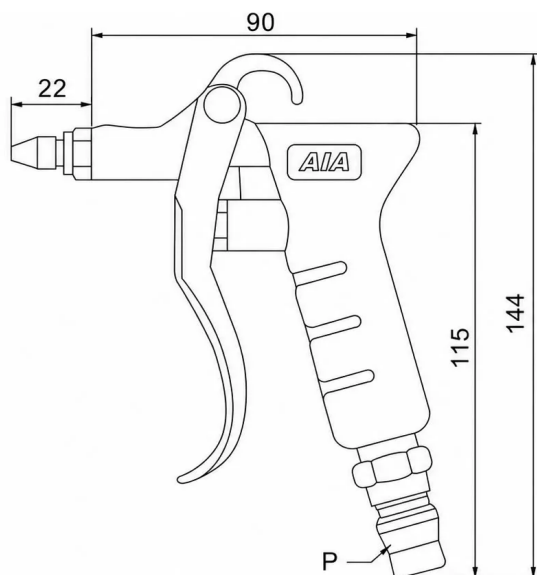

Nozzle Size	
Speed nozzle	
Small nozzle	
Large diameter nozzle	
Long nozzle	

Model	L	Muzzle Size	P	Accessories
A098	22 mm	Speed nozzle	Quick Connector	-
A098-S	16 mm	Small nozzle	Quick Connector	-
A098-D	75 mm	Large diameter nozzle	Quick Connector	-
A098-L1	100 mm	Long nozzle	Quick Connector	-

* Barrel length can be customized.

Applications

- Workshop cleaning and machinery maintenance.
- Production line cleaning, drying, and surface preparation.
- Molds, fixtures, machine corners, and hard-to-reach spaces.
- Adjustable blowing for different distances and materials.

Operating Guidance

Use filtered compressed air within the specified range. Select the nozzle according to airflow coverage, cleaning distance, access space, and required blowing intensity.

Safety Notes

- Do not direct compressed air toward people or unprotected skin.
- Isolate and depressurize the air supply before installation or service.
- Confirm connector compatibility and secure all connections before use.

Contact Information

Wenzhou Hongmi Pneumatic Co., Ltd.

Address: Room 501, Xingnan Village, Hongqiao Town, Yueqing City, Zhejiang, China

Email: vivilian@homipneu.com

Phone / WhatsApp: +86 136 0580 6063

Website: <https://homipneu.com>